




TOP VIEW
LEFT OUSIDE CORNER



TOP VIEW
RIGHT OUTSIDE CORNER

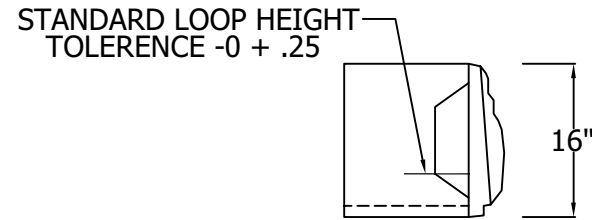

SIDE VIEW

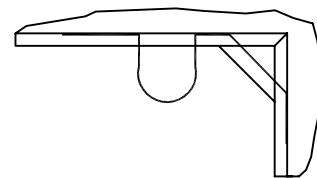

TOP VIEW
LEFT OUTSIDE CORNER

NOTE:

- 1) MINIMUM CONCRETE COMPRESSIVE STRENGTH 5500psi AT 28 DAYS
- 2) 6% AIR ENTRAINMENT
- 3) 3 LBS STRUCTURAL FIBER PER CUBIC YARD
- 4) FACING TEXTURE AS SPECIFIED IN CONTRACT

REV #	DESCRIPTION	DATE
-------	-------------	------

LOCK+LOAD™
RETAINING WALL SYSTEMS

1681 CHESTNUT STREET, SUITE 400, VANCOUVER, B.C. V6J 4M6
Tel: (604) 732-9990 Toll Free: 1-877-901-9998 Fax: (604) 737-1140
Web site: www.lock-load.com

DRAWING NAME	OUTSIDE CORNER
PROJECT NAME	TYPICAL DETAILS
LOCATION	
CITY	COUNTRY
DRAWN BY	DATE 01/06/12
APPROVED BY	PREPARED
SCALE N.T.S.	FOR
OUR PROJECT NUMBER	OUR DRAWING NUMBER
CUSTOMER DRAWING	OUTSIDE-CORNER