

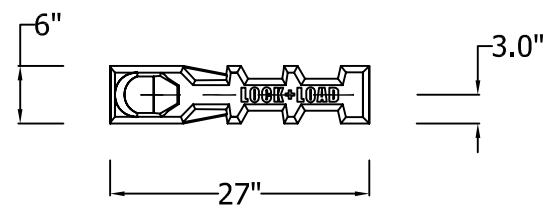



PICTORIAL VIEW



TOP VIEW



REAR VIEW

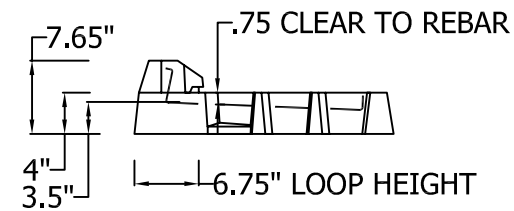

SIDE VIEW

- NOTE:**
- 1) MINIMUM CONCRETE COMPRESSIVE STRENGTH AT 28 DAYS 5500 PSI 42 mpa
 - 2) 6% AIR ENTRAINMENT
 - 3) 3 LBS STRUCTURAL FIBER PER CUBIC YARD

REV #	DESCRIPTION	DATE

LOCK+LOAD™
RETAINING WALL SYSTEMS
 1681 CHESTNUT STREET, SUITE 400, VANCOUVER, B.C. V6J 4M6
 Tel: (604) 732-9990 Toll Free: 1-877-401-9998 Fax: (604) 737-1140
 Web site: www.lock-load.com

DRAWING NAME: STANDARD COUNTERFORT	
PROJECT NAME:	
LOCATION:	
CITY:	COUNTRY:
DRAWN BY:	DATE: 01/06/12
APPROVED BY:	PREPARED FOR:
SCALE: N.T.S.	
OUR PROJECT NUMBER:	OUR DRAWING NUMBER: STANDARD COUNTERFORT