

TOP VIEW

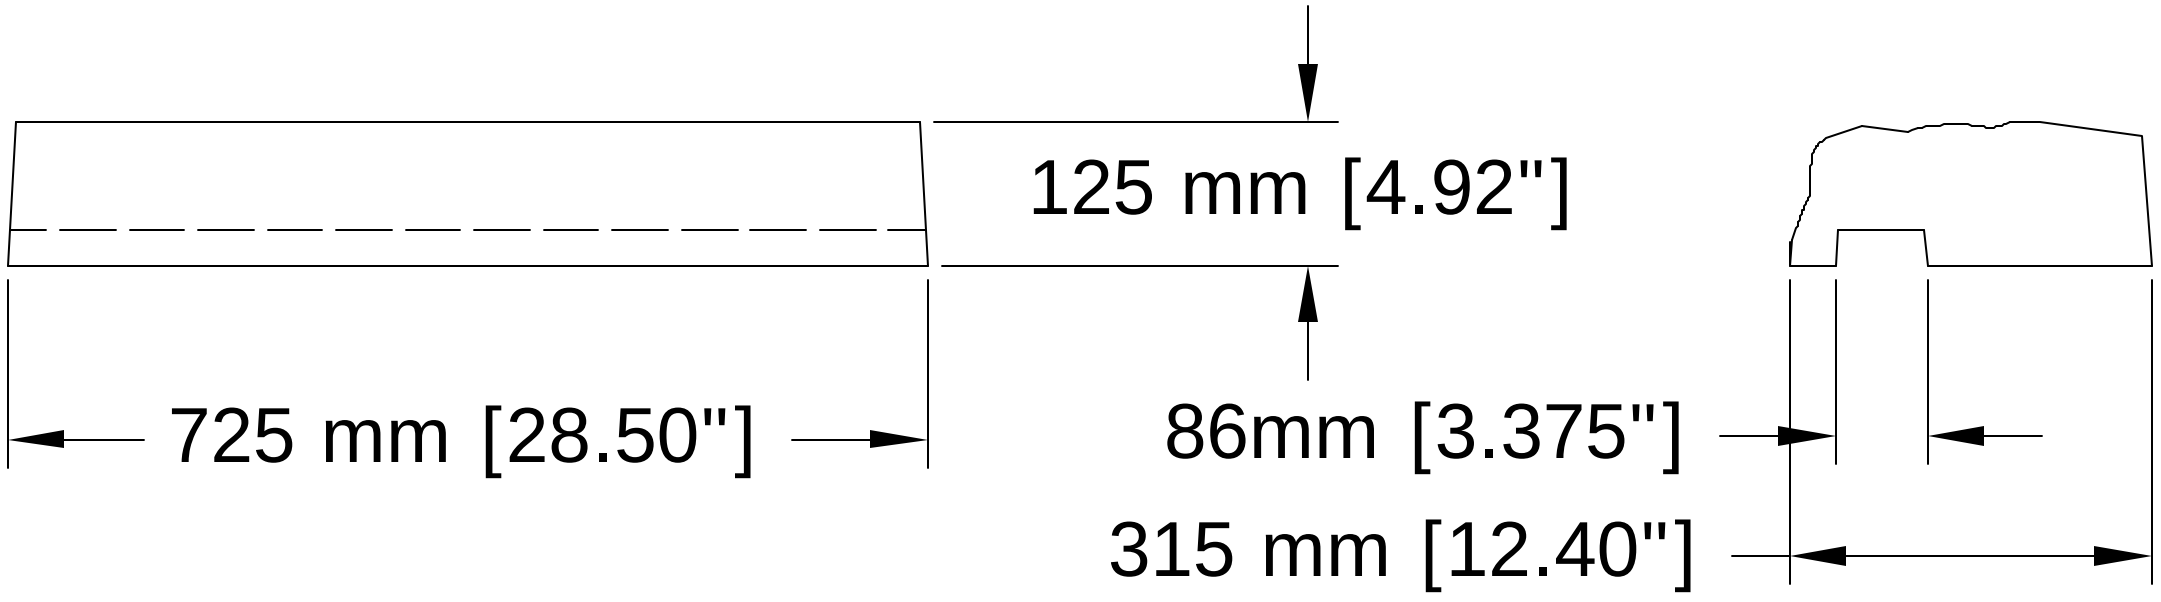

FRONT VIEW

SIDE VIEW

COLOUR
LIMESTONE GREY

REINFORCEMENT
POLY OLAFIN FIBRES

STRENGTH
40 MPa (5500 p.s.i.) MIN

PANEL WEIGHT
56 kg 124 lbs)

NOTE:-

This drawing is a representation of a typical L+L component and delivered components may vary slightly due to the specific casting equipment used in their manufacture contact each manufacturer plant for specific shop drawings when required.

REV #	DESCRIPTION	DATE

LOCK+LOAD™
RETAINING WALL SYSTEMS
1681 CHESTNUT STREET, SUITE 400, VANCOUVER, B.C. V6J 4M6
Tel:(604) 732-9990 Toll Free: 1-877-901-9998 Fax: (604) 737-1140
Web site: www.lock-load.com

ARCHITECTURAL TRIM WT-80
TYPICAL DRAWINGS

BRIAN E. KOTARBA | 2007-01-21
N.T.S. | PREPARED FOR
OUR PROJECT NUMBER | OUR DRAWING NUMBER
CUSTOMER DRAWING | CD-WT-80-001