
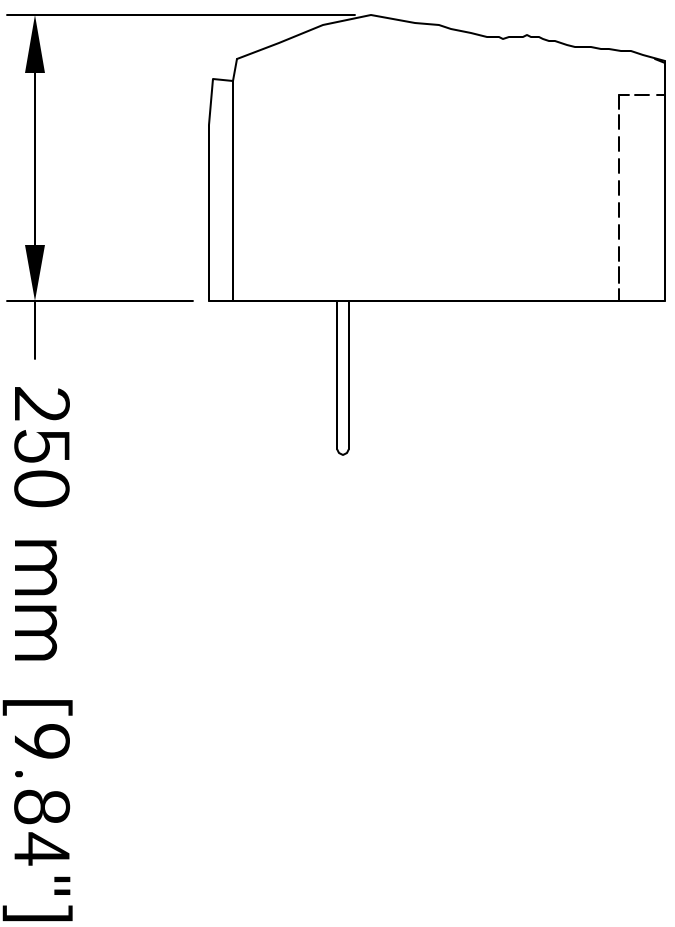


TOP VIEW

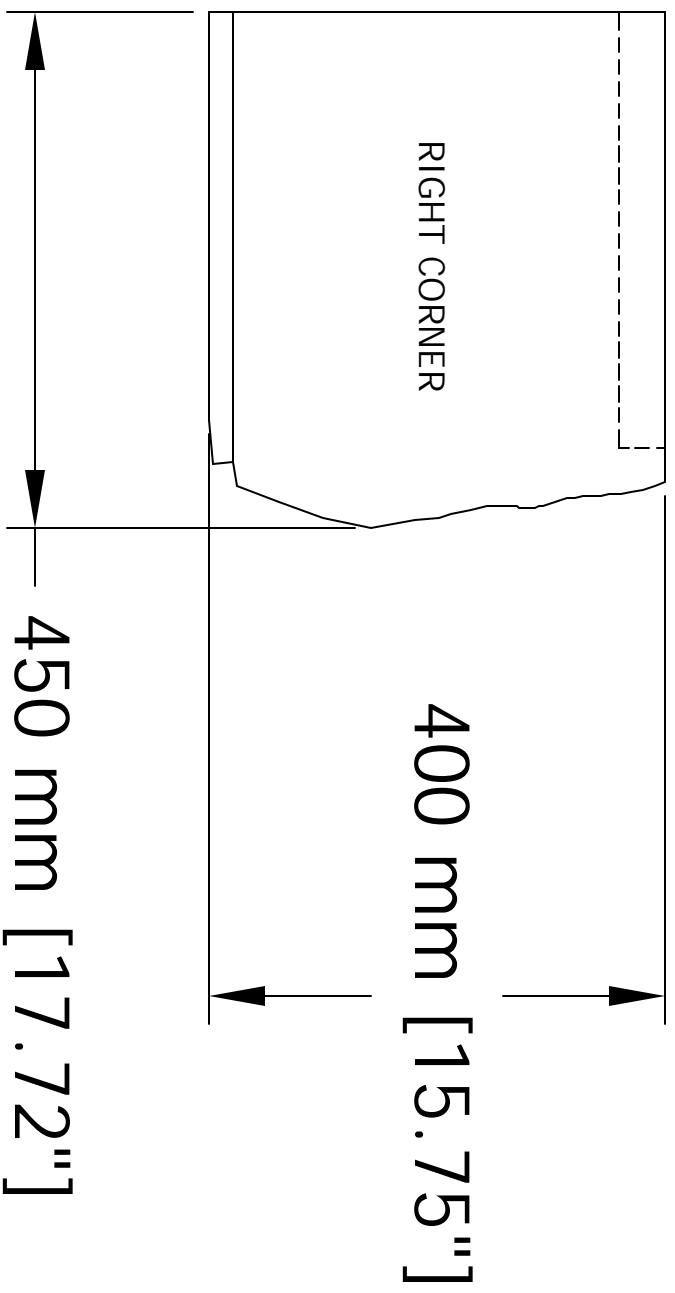

COLOUR

LIMESTONE GREY

REINFORCEMENT

1/4" OR 5/16" STAINLESS STEEL
OR
3/8" HOT DIPPED GALVANIZED STEEL
POLY OLAFIN FIBRE REINFORCEMENT

STRENGTH

40 MPa (5500 p.s.i.) MIN

PANEL WEIGHT

43 kg 93 lbs)

NOTE:-

This drawing is a representation of a typical L+L component and delivered components may vary slightly due to the specific casting equipment used in their manufacture contact each manufacturer plant for specific shop drawings when required.

REV #	DESCRIPTION	DATE

LOCK+LOAD™

RETAINING WALL SYSTEMS
1881 CHESTNUT STREET SUITE 400 VANCOUVER, B.C. V6J 4A6
Tel:(604) 732-9990 Toll Free: 1-877-901-9998 Fax: (604) 737-1140
Web site: www.lock-load.com

RIGHT HAND OUTSIDE CORNER RC-40

TYPICAL DRAWINGS

BRAN E. KOTARBA 2007.01.21
PREPARED FOR

N.T.S. OUR PROJECT NUMBER OUR DRAWING NUMBER

CUSTOMER DRAWING CD-RC-40-001

SIDE VIEWS