



TOP VIEW

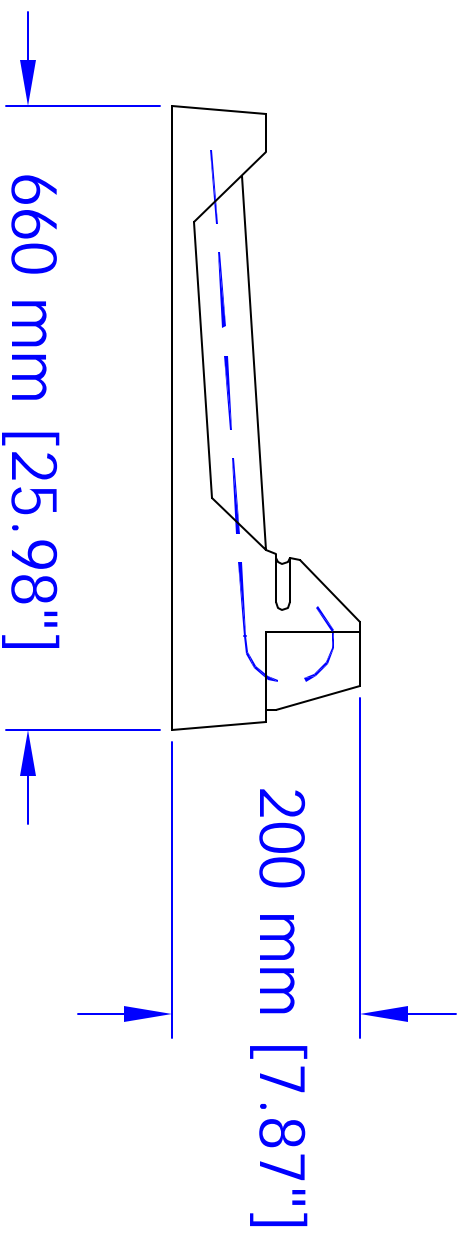

SIDE VIEW

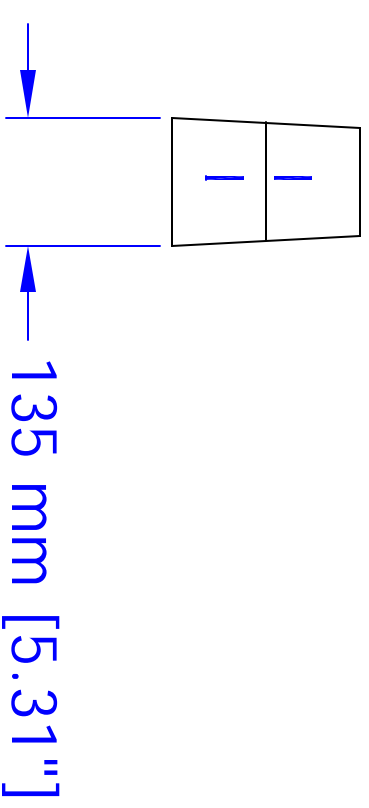

BACK VIEW

COLOUR
LIMESTONE GREY

REINFORCEMENT
3/8" OR 10M STEEL
POLY OLAFIN FIBRES

STRENGTH
40 MPa (5500 p.s.i.) MIN

PANEL WEIGHT
21 kg (45 lbs)

NOTE:-

This drawing is a representation of a typical L+L component and delivered components may vary slightly due to the specific casting equipment used in their manufacturer plant for specific shop drawings when required.

REV #	DESCRIPTION	DATE



MODEL # CF-66 STANDARD COUNTERPORT
TYPICAL DRAWINGS

DESIGNER: **SRJANI E. KOTARBA** 2007-01-21
PREPARED FOR

N.T.S.
CLIENT PROJECT NUMBER: **OUR DRAWING NUMBER**
CUSTOMER DRAWING: **CD-CF-66-001**